


VINO HAND SHOWER

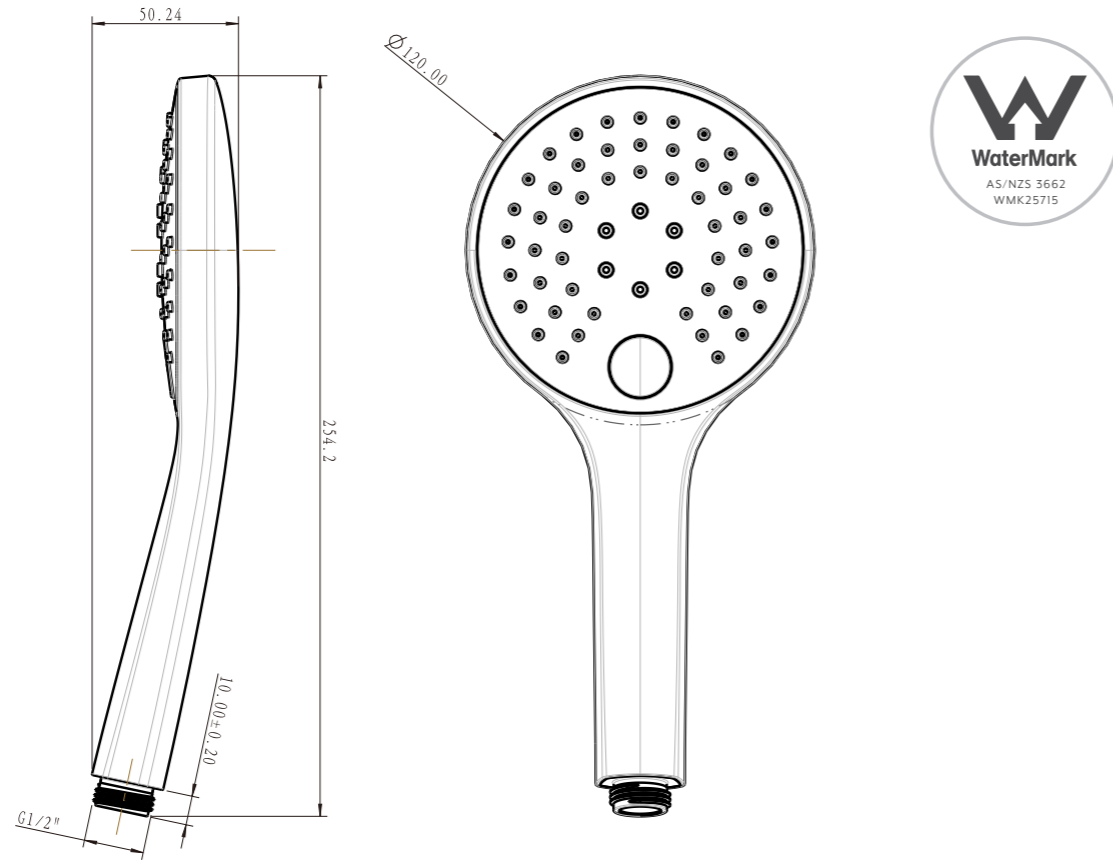

SPECIFICATIONS

RECOMMENDED USE

Domestic

COLOUR AVAILABILITY



PRESSURE RATING

Recommended minimum working pressure 150kPa
Recommended maximum working pressure 500kPa
Hot and cold water inlet pressure should be equal

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

SUITABLE HOT WATER UNITS

Storage tank: Yes
Continuous Flow: Yes
Gravity Feed: Not suitable

STANDARDS

Nominal Flow Rate(7.5 L/M)
Registration No.(S13217)

FUNCTIONS

Standard | Jet | Combination Standard & Jet


WARRANTY

Structure: 5 years | Finish: 2 years

INSTALLATION MANUAL

STEP ONE: Ensure flat washer is fitted inside the hose end.


STEP TWO: Connect the swivelling cone end of hose in a clockwise direction onto the VINO Hand Shower and hand tighten

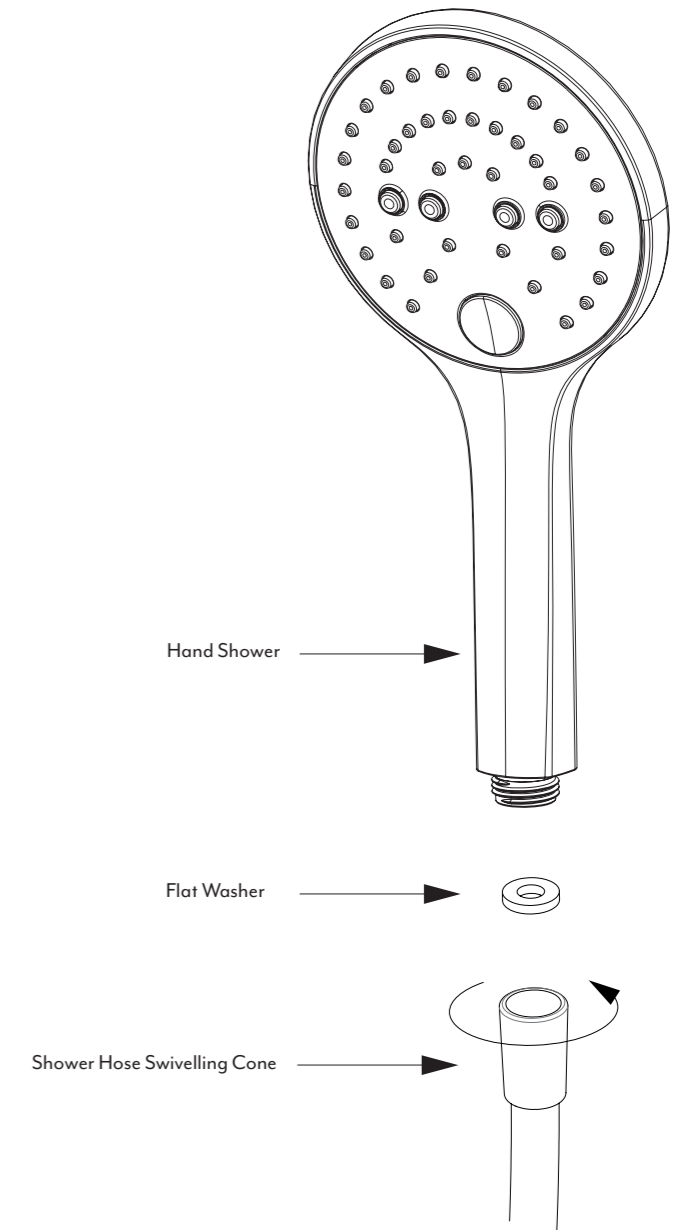

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material